



The Extended Temperature AS2100 is a thermally ruggedized model of Acuity's most accurate long-distance sensor. It retains the accuracy and speed of the standard model, but it can operate in a -40 to 60 °C ambient temperature range.

AS2100 Accurate Distance Sensor – Extended Temperature

The Extended Temperature AS2100 is a Class 2 laser that is designed to work well outdoors, in bright lights, and even on difficult targets such as hot or dark surfaces. It has the ability to take accurate measurements (± 1 mm) from distances up to 500 meters away and a measurement frequency of up to 250 Hz. The increased operational temperature range of -40 to 60 °C allows it to be used in conditions more challenging than the standard AS2100 model.

The Extended Temperature AS2100 has all the connection options of the standard model, so it can be used in any of the same applications where an expanded temperature range is needed.




AS2100 Extended Temperature Model Specifications

	English Units	Metric Units
Range	~2 in. min. to 328 ft. max (natural targets) ~20 in. min. to 1640 ft. max (reflective foil*)	0.05...~100 m (natural targets) ~0.5...500 m max (reflective foil*)
Accuracy @ 2 σ	± 0.039 in.	± 1 mm
Repeatability @ 2 σ	0.012 in.	0.3 mm
Resolution	0.004 in.	0.1 mm
Laser spot diameter @ 10, 50, 100 m	0.28 x 0.12 in.; 1.10 x 0.51 in.; 2.16 x 1.81 in.	7 x 3 mm; 28 x 13 mm; 55 x 30 mm
Dimensions (l x w x h)	5.51 x 3.07 x 1.89 in.	140 x 78 x 48 mm
Weight (less cable)	0.77 lbs.	350 grams
Laser class	Class 2, Complies with 21 CFR 1040.10 and with Laser Notice 50, IEC/EN60825-1:2014	
Laser type	Typical 650 nm (620 – 690 nm), <1 mW visible RED	
Power	12 - 30 Volts DC; Max. Current: 0.8A	
Sample rates	250 Hz	
Operating temp	-40 to 140 °F	-40 to 60 °C
Environmental	IP65	
Material	Sensor body: Aluminum Alloy EN-AW 6060 (Anodized 20 μ m) Front and back cover: Mineral reinforced nylon resin	
Shock & Vibration	IEC 60068-2-27 (Shock); IEC 60068-2-6 (Vibration)	
Outputs: Digital	RS232, RS422, RS485, USB (only for configuration), Ethernet option available	
Analog output, programmable	4-20 mA/0-20mA software configurable	
Measuring accuracy of analog output	± 0.1 % of the programmed AO range or ± 1.0 mm (Whichever is greater)	
	*Contact Acuity for these targets	

AS2100 Accurate Distance Sensor – Extended Temperature

Mechanical Dimensions Units in mm [inches].

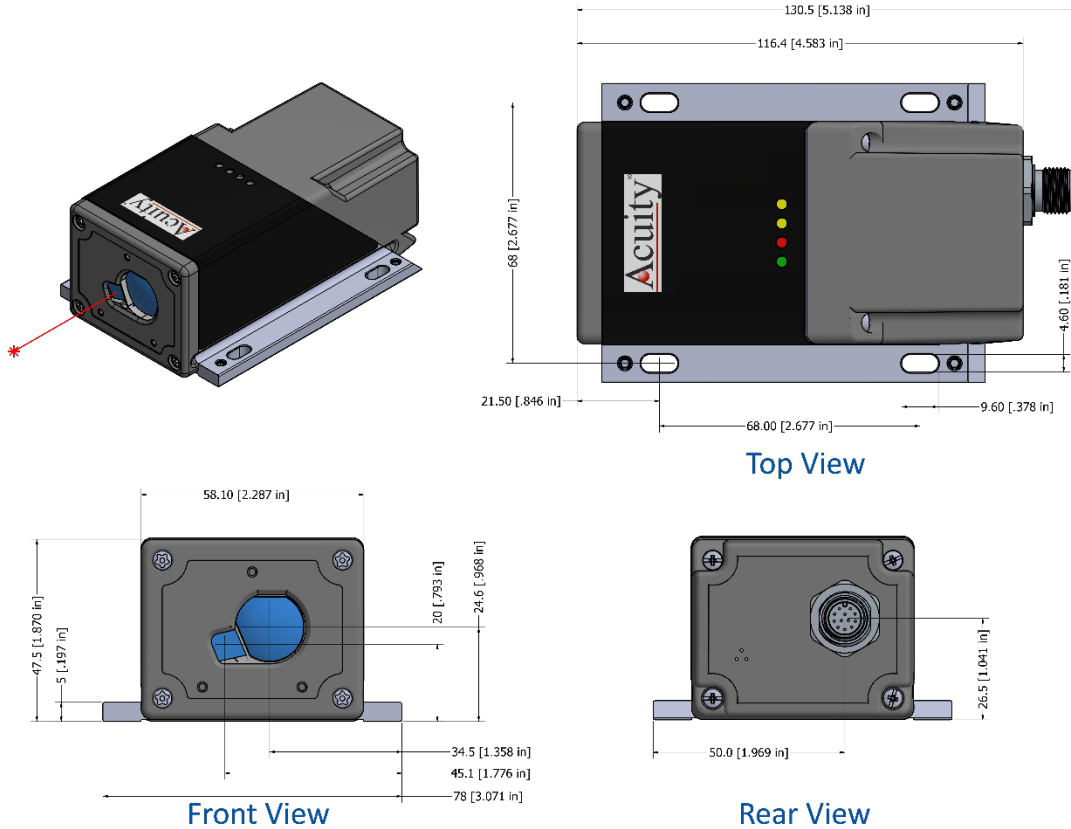

AS2100 Sensor Options see ordering information for part number.

Cables - Cables sold separately from unit. Standard cable lengths include 2M, 5M, 10M, 15M, 30M. Contact Acuity for custom cable lengths.

Ethernet Option - AS2100 can be ordered with an Ethernet/IP communication option.

Touch Panel Display - Smart controller displays distance readings and differential measurements with two sensors.

Connectivity Kit - Includes terminal blocks, serial cable with DB9 connector (optional serial to USB cable), AC power supply with 110 VAC or 240 VAC.

Reflective Plate - Reflective plate 210 x 297 mm (orange). The reflective aluminum target improves the reflected signal strength to measure long distance ranges.

Bracket alignment unit - Makes it easy to adjust the laser beam to the requested measuring target. The alignment unit allows +/-4° adjustment in two axis and is ideal for distances up to about 300m. The bracket is made of steel, zinc-plated and weighs about 850g.

Laser Safety Labels



Wavelength: 620-690nm, Max Power < 1mW
Complies with 21 CFR 1040.10 and 1040.11 except
for deviations pursuant to Laser Notice no. 50
dated June 24, 2007, with IEC 60825-1:2014



Updated 07/29/2024
© 2024 Schmitt Measurement Systems
Specifications subject to change without notice